


Dongguan Mengpeng Hardware Electronics Co., LTD.Address: No.2 Xindada Road,

Xinlian Town, Humen Town, Dongguan City

Contact: Ms.Cheng | Phone: 13559701520

Material: (10B21)	Heat-treated hardness: (HRC 36–40)	Surface electroplating: ① Environmental-friendly nickel; ② Chemical nickel; ③ Zinc; ④ Black nickel
-------------------	------------------------------------	--

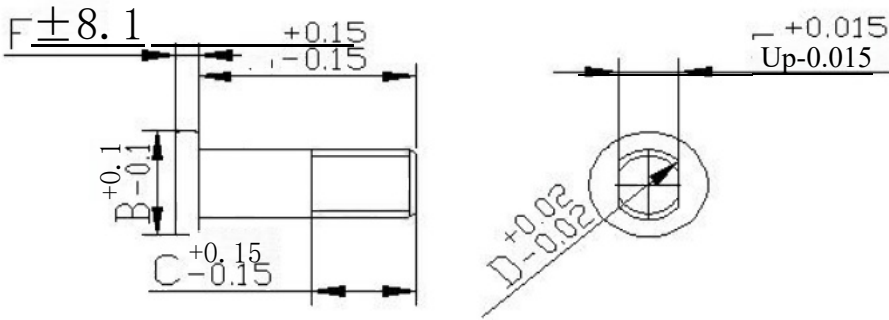

Order number	Screw gauge Grid	Total Length	Cap Diameter	Transverse view	Tooth length	Cap thickness	Round Position	Valid Length	Note: Use a T-shaped shaft at the beginning.
	M	A+F	B	E	C	F	D	A	C, F, B, and E are adjustable.
1	M4	17	7.5	3.2	5	1.7	4	15.3	1.3.01.M4001C
2	M4	18.5	6	3	5	1.2	4	17.3	1.3.01.M4004A
3	M4	22.8	6	3	6	1.8	4	21	1.3.01.M4002C
4	M4	26.6	6	3	6	1.5	4	25.1	1.3.01.M4003C
5	M5	10.5	6	3.94	5	1.2	5	6.3	1.3.01.M5008C
6	M5	13.8	7	4	5	1.5	5	12.3	1.3.01.M5017F
7	M5	14.5	9	4	6.5	2	5	12.2	1.3.01.M50121
8	M5	15	9	4	6.5	2	5	13	1.3.01.M50161
9	M5	15.5	9.9			2	5	13.5	1.3.01.M5014M
10	M5	16	8	4	6	2	5	14	1.3.01.M5006C
11	M5	16	8	4	6.5	2	5	14	1.3.01.M5004C
12	M5	16.9	10	3.97	6	1.5	5	15.4	1.3.01.M5013M
13	M5	16.9	10	4	6	1.5	5	15.4	1.3.01.M5009M
14	M5	17.2	9	4	6	1.2	5	16	1.3.01.M5007C
15	M5	18	8	4	5	2	5	16	1.3.01.M5018F

Dongguan Mengpeng Hardware Electronics Co., LTD.

Address: No.2 Xindada Road,


Xinlian Town, Humen Town, Dongguan City

Contact: Ms.Cheng | Phone: 13559701520

Material: (10B21)

Heat-treated hardness: (HRC 36~40)

Surface electroplating: ① Environmental-friendly nickel; ② Chemical nickel; ③ Zinc; ④ Black nickel

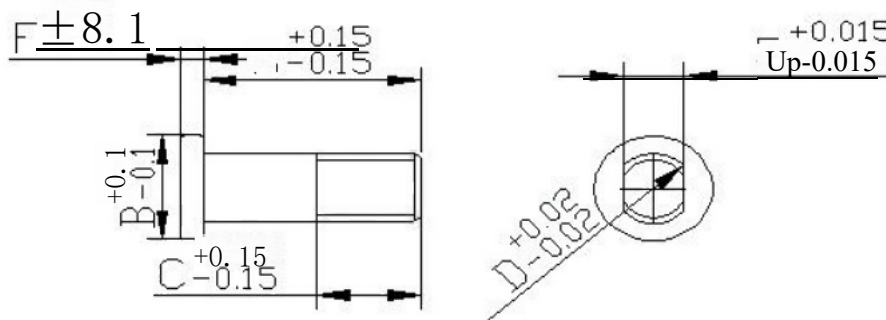

Order number	Screw gauge Grid	Total Length	Cap Diameter	Transverse view	Tooth length	Cap thickness	Round Position	Valid Length	Note: Use a T-shaped shaft at the beginning.
	M	A+F	B	E	C	F	D	A	C, F, B, and E are adjustable.
16	M5	18	8	4	8	2	5	16	1. 3. 01. M5001C
17	M5	20	8	4	8	2	5	18	1. 3. 01. M5002C
18	M5	21. 5	8	4	8	2	5	19. 5	1. 3. 01. M5010C
19	M5	22	8	4	6	2	5	20	1. 3. 01. M5005C
20	M5	22	8	4	9	2	5	20	1. 3. 01. M5011C
21	M5	24	8	4	11. 5	1. 5	5	22. 5	1. 3. 01. M5015M
22	M5	40	8	4	8	2	5	38	1. 3. 01. M5003C
23	M6	12	10	4. 5	7	1. 5	6	10. 5	1. 3. 01. M6071C
24	M6	13	10	4. 7	6	1. 5	6	11. 5	1. 3. 01. M6020C
25	M6	14	10	4. 5	7	1. 5	6	12. 5	1. 3. 01. M6054C
26	M6	14	10	4. 7	7	1. 5	6	12. 5	1. 3. 01. M6001C
27	M6	14	12	4. 7	7	1. 5	6	12. 5	1. 3. 01. M6121C
28	M6	14	15	4. 7	7	1. 5	6	12. 5	1. 3. 01. M6113C
29	M6	15	10	4. 7	7. 3	2	6	13	1. 3. 01. M6094C
30	M6	15. 5	10	4. 3	6. 5	2	6	30	1. 3. 01. M6098C

Dongwu City Heping Wujin Electronics Co., Ltd.


Address: No.2 Xinlian Xinda Road, Humen Town, Dongguan City

Contact: Ms.Cheng | Phone: 13559701520

Material: (10B21)

Heat-treated hardness: (HRC 36-40)

Surface electroplating: ① Environmental-friendly nickel; ② Chemical nickel; ③ Zinc; ④ Black nickel

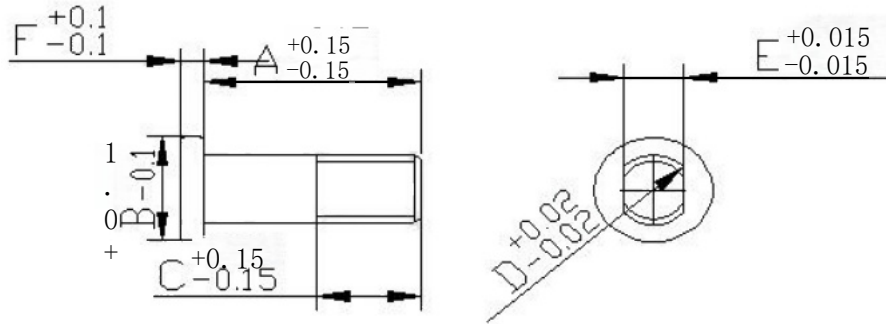


Order number	Screw gauge Grid	Total Length	Cap Diameter	Transverse view	Tooth length	Cap thickness	Round Position	Valid Length	Note: Use a T-shaped shaft at the beginning.
	M	A+F	B	E	C	F	D	A	C, F, B, and E are adjustable.
31	M6	15.5	10	4.7	6.5	2	6	13.5	1.3.01.M6038C
32	M6	15.5	12	4.7	6.5	2	6	13.5	1.3.01.M6112C
33	M6	16	10	4.2	7	1.4	6	7.5	1.3.01.M6088J
34	M6	16	10	4.65	8	2	6	14	1.3.01.M6002C
35	M6	16	10	4.7	7.48	1.4	6	14.6	1.3.01.M6076C
36	M6	16.5	10	4.5	6.5	2	6	8	1.3.01.M6083M
37	M6	16.5	15	4.6	8.8	1.5	6	15	1.3.01.M6053C
38	M6	16.5	15	4.7	8.8	1.5	6	15	1.3.01.M6052C
39	M6	17	10	4.5	8	2	6	15	1.3.01.M6003C
40	M6	17	10	4.5	8	2	6	45	1.3.01.M6014C
41	M6	17	10	4.7	8	2	6	15	1.3.01.M6041C
42	M6	17	10	4.7	8	2	6	15	1.3.01.M6058C
43	M6	17	12	4.7	8	2	6	15	1.3.01.M6123C
44	M6	17.5	10	4.5	7	2	6	8	1.3.01.M6085M
45	M6	17.5	10	4.5	8.5	2	6	15.5	1.3.01.M6073M

Dongguan Mengpeng Hardware Electronics Co., LTD.Address: No.2 Xindada Road,

Xinlian Town, Humen Town, Dongguan City

Contact: Ms.Cheng | Phone: 13559701520

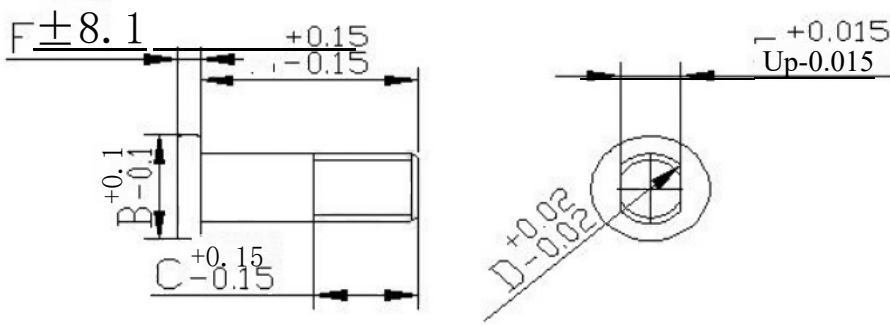Material: (10B21)		Heat-treated hardness: (HRC 36–40)			Surface electroplating: ① Environmental-friendly nickel; ② Chemical nickel; ③ Zinc; ④ Black nickel				
									
Order number	Screw gauge	Total Length	Cap Diameter	Transverse view	Tooth length	Cap thickness	Round Position	Valid Length	Note: Use a T-shaped shaft at the beginning. C, F, B, and E are adjustable.
	Grid								
	M	A+F	B	E	C	F	D	A	
46	M6	17.5	15	4.5	9.8	2	6	15.5	1.3.01.M6026C
47	M6	18	10	4.5	8	2	6	16	1.3.01.M6004C
48	M6	18	10	4.7	7	2	6	9	1.3.01.M6090C
49	M6	18	11	4.7	8	2	6	16	1.3.01.M6021C
50	M6	18.5	10	4.7	8.5	2	6	16.5	1.3.01.M6126C
51	M6	19	15	4.6	10	2	6	17	1.3.01.M6030C
52	M6	19.5	10	4.5	7.5	2	6	10	1.3.01.M60791
53	M6	20	10	4.5	8	2	6	18	1.3.01.M6005C
54	M6	20	10	4.5	10	2	6	18	1.3.01.M6050C
55	M6	20	10	4.6	10	2	6	18	1.3.01.M6056C
56	M6	20	10	4.7	7.5	2	6	18	1.3.01.M6027C
57	M6	20	10	4.7	7.5	2	6	18	1.3.01.M6075C
58	M6	20	10	4.74	8	2	6	18	1.3.01.M6117C
59	M6	20.3	13.6	4.5	9.3	3	6	17.3	1.3.01.M6103C
60	M6	20.3	14	4.5	8.3	4	6	8	1.3.01.M6087C

Dongguan Mengpeng Hardware Electronics Co., LTD. Address: No.2 Xindada Road,


Xinlian Town, Humen Town, Dongguan City

Contact: Ms.Cheng | Phone: 13559701520

Material: (10B21)

Heat-treated hardness: (HRC 36~40)

Surface electroplating: ① Environmental-friendly nickel; ② Chemical nickel; ③ Zinc; ④ Black nickel

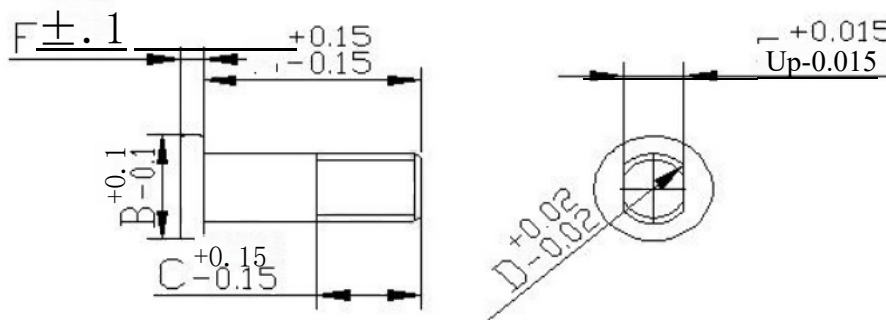

Order number	Screw gauge Grid	Total Length	Cap Diameter	Transverse view	Tooth length	Cap thickness	Round Position	Valid Length	Note: Use a T-shaped shaft at the beginning.
	M	A+F	B	E	C	F	D	A	C, F, B, and E are adjustable.
61	M6	20.5	10	4.5	8.5	2	6	18.5	1.3.01.M6006C
62	M6	21	10	4.5	8.5	2	6	19	1.3.01.M6028C
63	M6	21	10	4.7	8	2	6	19	1.3.01.M6007C
64	M6	21	15	4.5	8.5	2	6	19	1.3.01.M6024C
65	M6	21	15	4.5	8.5	2	6	19	1.3.01.M6119L
66	M6	21.5	10	4.5	8.5	2	6	11	1.3.01.M6081M
67	M6	22	10	4.5	9	2	6	20	1.3.01.M6048C
68	M6	22	10	4.5	9.5	2	6	10.5	1.3.01.M6089C
69	M6	22	10	4.56	7	2	6	20	1.3.01.M6109A
70	M6	22	10	4.65	9	2	6	20	1.3.01.M6008C
71	M6	22	11	5	9.5	2	6	20	1.3.01.M60251
72	M6	22	15	4.5	10	2	6	20	1.3.01.M6031C
73	M6	22	15	4.65	10	2	6	20	1.3.01.M6042C
74	M6	22.2	10	4.5	7	2	6	20.2	1.3.01.M61061
75	M6	22.5	11	4.7	8	2	6	20.5	1.3.01.M61081

Dongguan Mengpeng Hardware Electronics Co., LTD.

Address: No.2 Xindada Road,


Xinlian Town, Humen Town, Dongguan City

Contact: Ms.Cheng | Phone: 13559701520

Material: (10B21)

Heat-treated hardness: (HRC 36~40)

Surface electroplating: ① Environmental-friendly nickel; ② Chemical nickel; ③ Zinc; ④ Black nickel

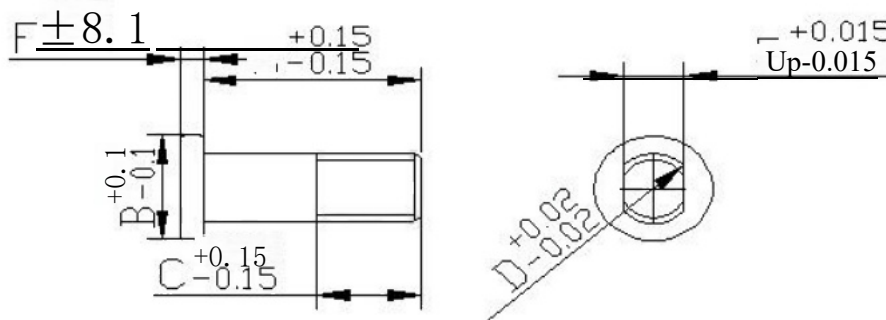

Order number	Screw gauge	Total Length	Cap Diameter	Transverse view	Tooth length	Cap thickness	Round Position	Valid Length	Note: Use a T-shaped shaft at the beginning. C, F, B, and E are adjustable.
	Grid								
	M	A+F	B	E	C	F	D	A	
76	M6	22.7	10	4.5	7.7	2	6	13	1.3.01.M6082M
77	M6	23	10	4.5	8	2	6	21	1.3.01.M6046C
78	M6	23	10	4.56	7	2	6	21	1.3.01.M6104A
79	M6	23	10	4.7	8	2	6	21	1.3.01.M6009C
80	M6	23	10	4.7	9	2	6	21	1.3.01.M6023C
81	M6	23.5	10	4.5	7	2.5	6	21	1.3.01.M6116A
82	M6	24	10	4.5	10	2	6	22	1.3.01.M6120C
83	M6	24	10	4.7	10	2	6	22	1.3.01.M6055C
84	M6	24	15	4.5	10	2	6	22	1.3.01.M6010C
85	M6	24	15	4.55	10	2	6	22	1.3.01.M6125C
86	M6	24.2	10	4.5	5.2	2	6	22.2	1.3.01.M61101
87	M6	25	8	4.7	11	2	6	23	1.3.01.M6047C
88	M6	25	10	4.0	13	1.4	6	10.5	1.3.01.M6086C
89	M6	25	10	4.5	12.5	2	6	23	1.3.01.M6049A
90	M6	25	15	4.5	10	2	6	23	1.3.01.M6067C

Dongguan Mengpeng Hardware Electronics Co., LTD.

Address: No.2 Xindada Road,


Xinlian Town, Humen Town, Dongguan City

Contact: Ms.Cheng | Phone: 13559701520

Material: (10B21)

Heat-treated hardness: (HRC 36~40)

Surface electroplating: ① Environmental-friendly nickel; ② Chemical nickel; ③ Zinc; ④ Black nickel

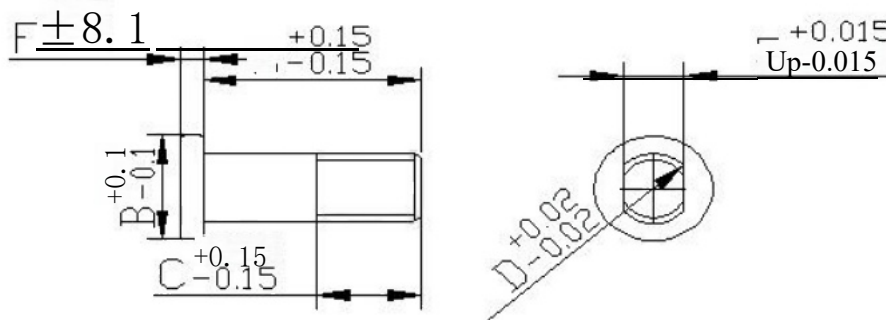

Order number	Screw gauge Grid	Total Length	Cap Diameter	Transverse view	Tooth length	Cap thickness	Round Position	Valid Length	Note: Use a T-shaped shaft at the beginning.
	M	A+F	B	E	C	F	D	A	C, F, B, and E are adjustable.
91	M6	26	13	4.3	11	2	6	24	1.3.01.M6043C
92	M6	26	13	4.7	11	2	6	24	1.3.01.M6029C
93	M6	26	13.6	4.7	15	2	6	24	1.3.01.M6124C
94	M6	26.8	10	4.7	6.5	1.8	6	25	1.3.01.M6061A
95	M6	26.9	10	4.5	8.5	1.4	6	25.5	1.3.01.M6069C
96	M6	27	15	4.5	10	2	6	25	1.3.01.M6066C
97	M6	27	15	4.5	10	2	6	25	1.3.01.M6070L
98	M6	28	11	4.5	5	2	6	21.5	1.3.01.M6084M
99	M6	28.5	10	4.5	10	2	6	26.5	1.3.01.M6032C
100	M6	30	11	4.7	9.5	2	6	28	1.3.01.M61071
101	M6	30	15	4.54	6	2	6	28	1.3.01.M6099C
102	M6	30	15	4.54	6	2	6	28	1.3.01.M6100L
103	M6	32	10	4.5	5	2	6	30	1.3.01.M6011C
104	M6	32	10	4.5	5	2	6	30	1.3.01.M6092I
105	M6	32	10	4.5	5	2	6	30	1.3.01.M6093B

Dongguan Mengpeng Hardware and Electronics Co., Ltd.


Address: No.2 Xinlian Xinda Road, Humen Town, Dongguan City

Contact: Ms.Cheng | Phone: 13559701520

Material: (10B21)

Heat-treated hardness: (HRC 36~40)

Surface electroplating: ① Environmental-friendly nickel; ② Chemical nickel; ③ Zinc; ④ Black nickel

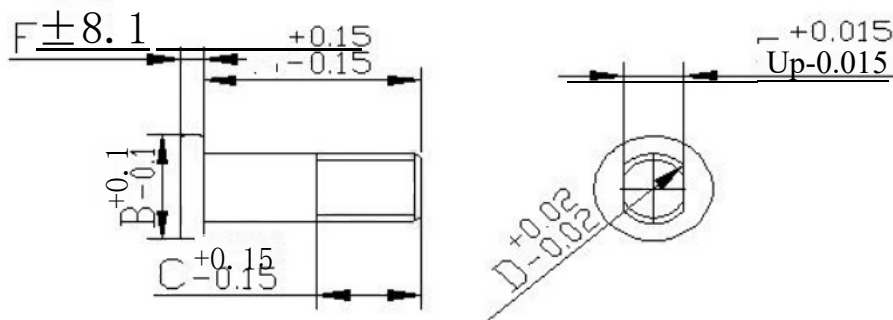


Order number	Screw gauge Grid	Total Length	Cap Diameter	Transverse view	Tooth length	Cap thickness	Round Position	Valid Length	Note: Use a T-shaped shaft at the beginning.
	M	A+F	B	E	C	F	D	A	C, F, B, and E are adjustable.
106	M6	32	15	4.5	8	2	6	22	1.3.01.M6077C
107	M6	32	15	4.5	8	2	6	22	1.3.01.M6078L
108	M6	32	15	4.54	8	2	6	30	1.3.01.M6095C
109	M6	32	15	4.54	8	2	6	30	1.3.01.M6096L
110	M6	33	10	4.5	6	2	6	31	1.3.01.M6019C
111	M6	33.5	10	4.5	9	2.5	6	31	1.3.01.M6115A
112	M6	34	10	4.5	10.5	2	6	32	1.3.01.M6051C
113	M6	34	10	4.7	10	2	6	32	1.3.01.M6060C
114	M6	34	10	4.7	10	2	6	32	1.3.01.M6068C
115	M6	34	15	4.5	10	2	6	32	1.3.01.M6101C
116	M6	34	15	4.5	10	2	6	32	1.3.01.M6102L
117	M6	37.5	8	4.51	6.65	1.5	6	36	1.3.01.M6114A
118	M6	37.5	10	4.5	8	2	6	35.5	1.3.01.M6012C
119	M6	38.5	15	4.6	15.4	1.6	6	36.9	1.3.01.M6039C
120	M6	39	10	4.4	8.5	2	6	37	1.3.01.M6122C

Dongguan Mengpeng Hardware Electronics Co., LTD.Address: No.2 Xindada Road,

Xinlian Town, Humen Town, Dongguan City

Contact: Ms.Cheng | Phone: 13559701520

Material: (10B21)	Heat-treated hardness: (HRC 36–40)	Surface electroplating: ① Environmental-friendly nickel; ② Chemical nickel; ③ Zinc; ④ Black nickel
-------------------	------------------------------------	--

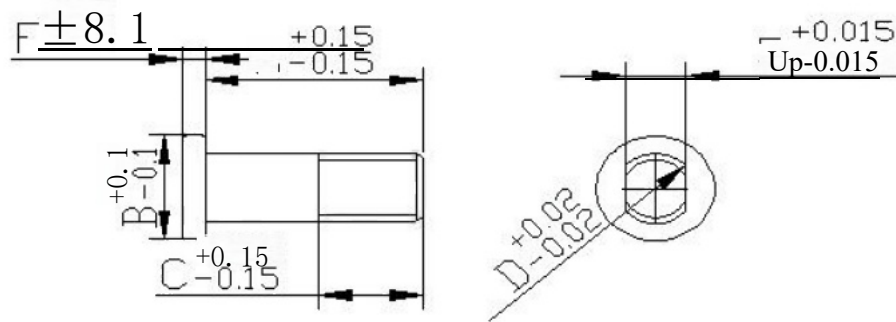


Order number	Screw gauge Grid	Total Length	Cap Diameter	Transverse view	Tooth length	Cap thickness	Round Position	Valid Length	Note: Use a T-shaped shaft at the beginning.
	M	A+F	B	E	C	F	D	A	C, F, B, and E are adjustable.
121	M6	39	10	4.5	8.5	2	6	37	1. 3. 01. M6033C
122	M6	39	10	4.5	8.5	2	6	37	1. 3. 01. M61181
123	M6	41	10	4.5	8	2	6	39	1. 3. 01. M6013C
124	M6	41	10	4.5	8	2	6	39	1. 3. 01. M61051
125	M6	42	10	4.5	11	2	6	37	1. 3. 01. M6034C
126	M6	43	10	4.5	6.5	2	6	41	1. 3. 01. M6074M
127	M6	43	10	4.5	10	2	6	41	1. 3. 01. M6097M
128	M6	43.5	10	4.5	6.5	2.5	6	41	1. 3. 01. M6091M
129	M6	45	10	4.5	5.5	1.5	6	43.5	1. 3. 01. M6040C
130	M6	45	10	4.5	8.5	2	6	43	1. 3. 01. M6044C
131	M6	48.5	10	4.5	8	2	6	46.5	1. 3. 01. M6015C
132	M6	48.5	10	4.5	8	2	6	46.5	1. 3. 01. M60651
133	M6	48.5	10	4.5	8	2	6	46.5	1. 3. 01. M6111M
134	M6	48.5	10	4.7	8	2	6	46.5	1. 3. 01. M60641
135	M6	49.6	10	4.5	7.6	2	6	40	1. 3. 01. M6035C

Dongguan Mengpeng Hardware Electronics Co., LTD.Address: No.2 Xindada Road,

Xinlian Town, Humen Town, Dongguan City

Contact: Ms.Cheng | Phone: 13559701520

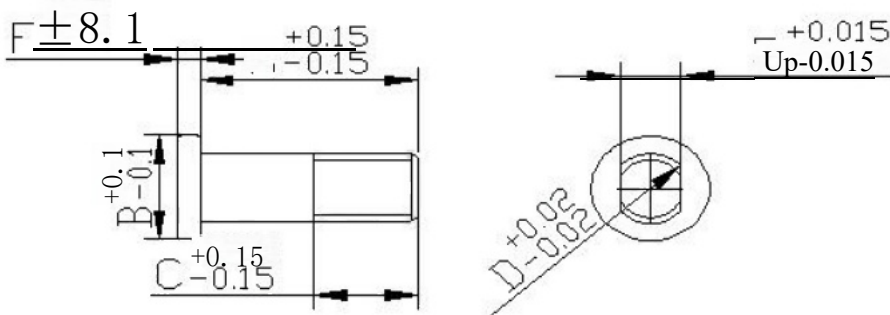Material: (10B21)		Heat-treated hardness: (HRC 36–40)			Surface electroplating: ① Environmental-friendly nickel; ② Chemical nickel; ③ Zinc; ④ Black nickel				
									
Order number	Screw gauge	Total Length	Cap Diameter	Transverse view	Tooth length	Cap thickness	Round Position	Valid Length	Note: Use a T-shaped shaft at the beginning.
	Grid								
	M	A+F	B	E	C	F	D	A	C, F, B, and E are adjustable.
136	M6	49.6	10	4.52*4.48	7.6	2	6	47.5	1.3.01.M6072I
137	M6	50	12	4.5	8	2	6	48	1.3.01.M6045C
138	M6	50	12	4.5	8	2	6	48	1.3.01.M6057K
139	M6	50	12	4.5	8	2	6	48	1.3.01.M6062M
140	M6	50	12	4.7	8	2	6	48	1.3.01.M6016C
141	M6	51	2	4.5	9	2	6	49	1.3.01.M6022C
142	M6	51	11	4.5	9	2	6	40	1.3.01.M6080M
143	M6	52	10	4.5	10	2	6	50	1.3.01.M6036C
144	M6	55	10	4.7	7	2	6	53	1.3.01.M6037C
145	M6	55	10	4.7	8	2	6	53	1.3.01.M6063I
146	M6	56	10	4.5	8	2	6	54	1.3.01.M6017C
147	M6	56	10	4.7	8	2	6	54	1.3.01.M6059C
148	M6	59	12	4.7	8	2	6	57	1.3.01.M6018C
149	M8	14	14.5	6	5	2	8	7	1.3.01.M8028I
150	M8	15.2	10	6	6.2	2	8	13.2	1.3.01.M8033M

Dongguan Mengpeng Hardware and Electronics Co., Ltd.


Address: No.2 Xinlian Xinda Road, Humen Town, Dongguan City

Contact: Ms.Cheng | Phone: 13559701520

Material: (10B21)

Heat-treated hardness: (HRC 36~40)

Surface electroplating: ① Environmental-friendly nickel; ② Chemical nickel; ③ Zinc; ④ Black nickel

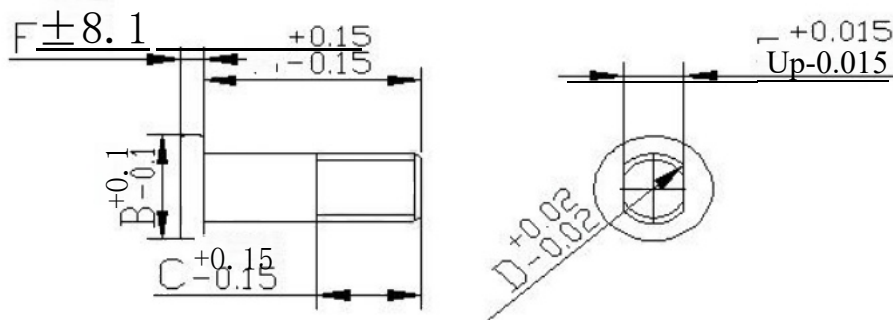

Order number	Screw gauge Grid	Total Length	Cap Diameter	Transverse view	Tooth length	Cap thickness	Round Position	Valid Length	Note: Use a T-shaped shaft at the beginning.
	M	A+F	B	E	C	F	D	A	C, F, B, and E are adjustable.
151	M8	15.5	15	6	7	2	8	14	1.3.01.M80321
152	M8	16.9	12	6	6.4	1.5	8	16	1.3.01.M8026C
153	M8	17	12	6	8	2	8	15	1.3.01.M8022C
154	M8	17	12	6	8	2	8	15	1.3.01.M8027B
155	M8	18	12	6	8	2	8	16	1.3.01.M8005C
156	M8	18.1	10	6	8.6	1.5	8	16.6	1.3.01.M8024I
157	M8	18.1	13	6	8.5	2	8	16.1	1.3.01.M8025M
158	M8	19	12	6	8	1.5	8	17.5	1.3.01.M8023C
159	M8	19	12	6	8	2	8	17	1.3.01.M8001C
160	M8	20	12	6	7	1.5	8	18.5	1.3.01.M8010K
161	M8	20	12	6	10	2	8	18	1.3.01.M8021K
162	M8	20	12	6	10	2	8	18	1.3.01.M8029C
163	M8	21	12	6	10	2	8	19	1.3.01.M8019C
164	M8	21.5	12	6	10	2	8	19.5	1.3.01.M8035C
165	M8	21.7	16	6	8.5	2.5	8	19.2	1.3.01.M8002C

Dongguan Mengpeng Hardware and Electronics Co., Ltd.


Address: No.2 Xinlian Xinda Road, Humen Town, Dongguan City

Contact: Ms.Cheng | Phone: 13559701520

Material: (10B21)

Heat-treated hardness: (HRC 36~40)

Surface electroplating: ① Environmental-friendly nickel; ② Chemical nickel; ③ Zinc; ④ Black nickel

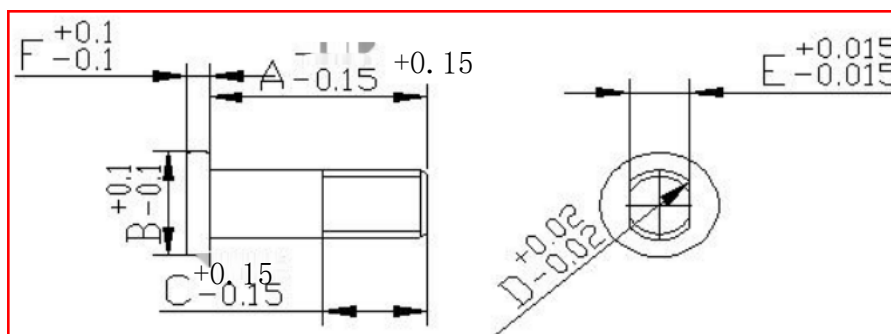

Order number	Screw gauge Grid	Total Length	Cap Diameter	Transverse view	Tooth length	Cap thickness	Round Position	Valid Length	Note: Use a T-shaped shaft at the beginning.
	M	A+F	B	E	C	F	D	A	C, F, B, and E are adjustable.
166	M8	22	12	6	8	2	8	20	1. 3. 01. M8003C
167	M8	23	12	6	9	2	8	21	1. 3. 01. M8012C
168	M8	23	12	6	12	2	8	21	1. 3. 01. M8007C
169	M8	23.5	15	6	10.8	2	8	21.5	1. 3. 01. M8013C
170	M8	25	12	6	8	2	8	23	1. 3. 01. M8004C
171	M8	25	12	6	12	2	8	23	1. 3. 01. M8020K
172	M8	26	12	6	9	2	8	24	1. 3. 01. M8009C
173	M8	26	12	6	9	2	8	24	1. 3. 01. M8011C
174	M8	28	12.8	6	10	2	8	26	1. 3. 01. M8018C
175	M8	30	12	6	8	2	8	28	1. 3. 01. M8015C
176	M8	30.7	12	6	8.7	2	8	28.7	1. 3. 01. M8031C
177	M8	31	15	6	14	2	8	29	1. 3. 01. M8006C
178	M8	35	12	6	13	2	8	33	1. 3. 01. M8034C
179	M8	40	15	6	10	1.7	8	38.3	1. 3. 01. M8008C
180	M8	40	15	6	10	1.7	8	38.3	1. 3. 01. M8014C
181	M8	45.5	12	6	8	2	8	43.5	1. 3. 01. M8016C

Dongwu City Heping Wujin Electronics Co., Ltd.


Address: No.2 Xinlian Xinda Road, Humen Town, Dongguan City

Contact: Ms.Cheng | Phone: 13559701520

Material: (10B21)

Heat-treated hardness: (HRC 36~40)

Surface electroplating: ① Environmental-friendly nickel; ② Chemical nickel; ③ Zinc; ④ Black nickel

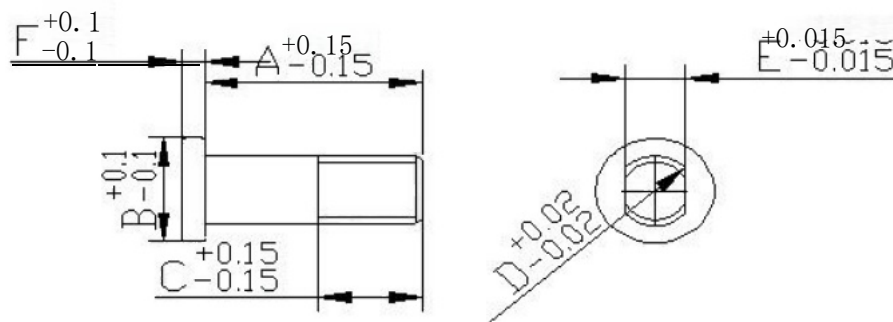

Order number	Screw gauge Grid	Total Length	Cap Diameter	Transverse view	Tooth length	Cap thickness	Round Posit- ion	Valid Length	Note: Use a T-shaped shaft at the beginning.
	M	A+F	B	E	C	F	D	A	C, F, B, and E are adjustable.
182	M8	46	10	6	7.5	2	8	44	1.3.01.M8017C
183	M8	50.5	12	6	7	2	8	48.5	1.3.01.M8036M
184	M8	51.5	12	6.5	9.5	2.5	8	49	1.3.01.M8030M